


Modular Type Air Combination

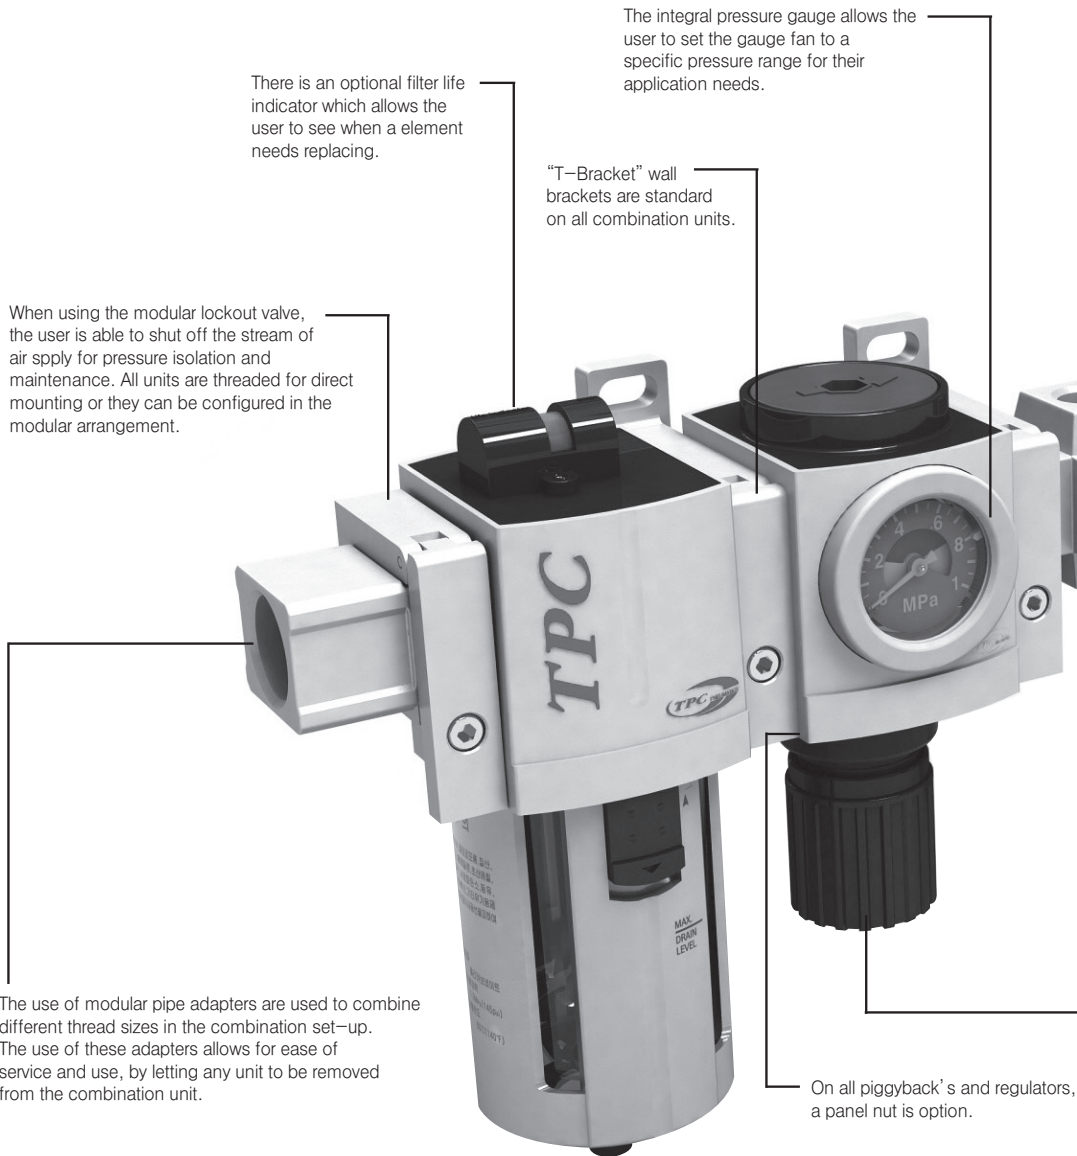

There is an optional filter life indicator which allows the user to see when a element needs replacing.

The integral pressure gauge allows the user to set the gauge fan to a specific pressure range for their application needs.

"T-Bracket" wall brackets are standard on all combination units.

When using the modular lockout valve, the user is able to shut off the stream of air supply for pressure isolation and maintenance. All units are threaded for direct mounting or they can be configured in the modular arrangement.

The use of modular pipe adapters are used to combine different thread sizes in the combination set-up. The use of these adapters allows for ease of service and use, by letting any unit to be removed from the combination unit.

On all piggyback's and regulators, a panel nut is option.

PC2 Series


1/8" AND 1/4"

PC3 Series

1/4" AND 3/8"

PC4 Series

3/8" AND 1/2"

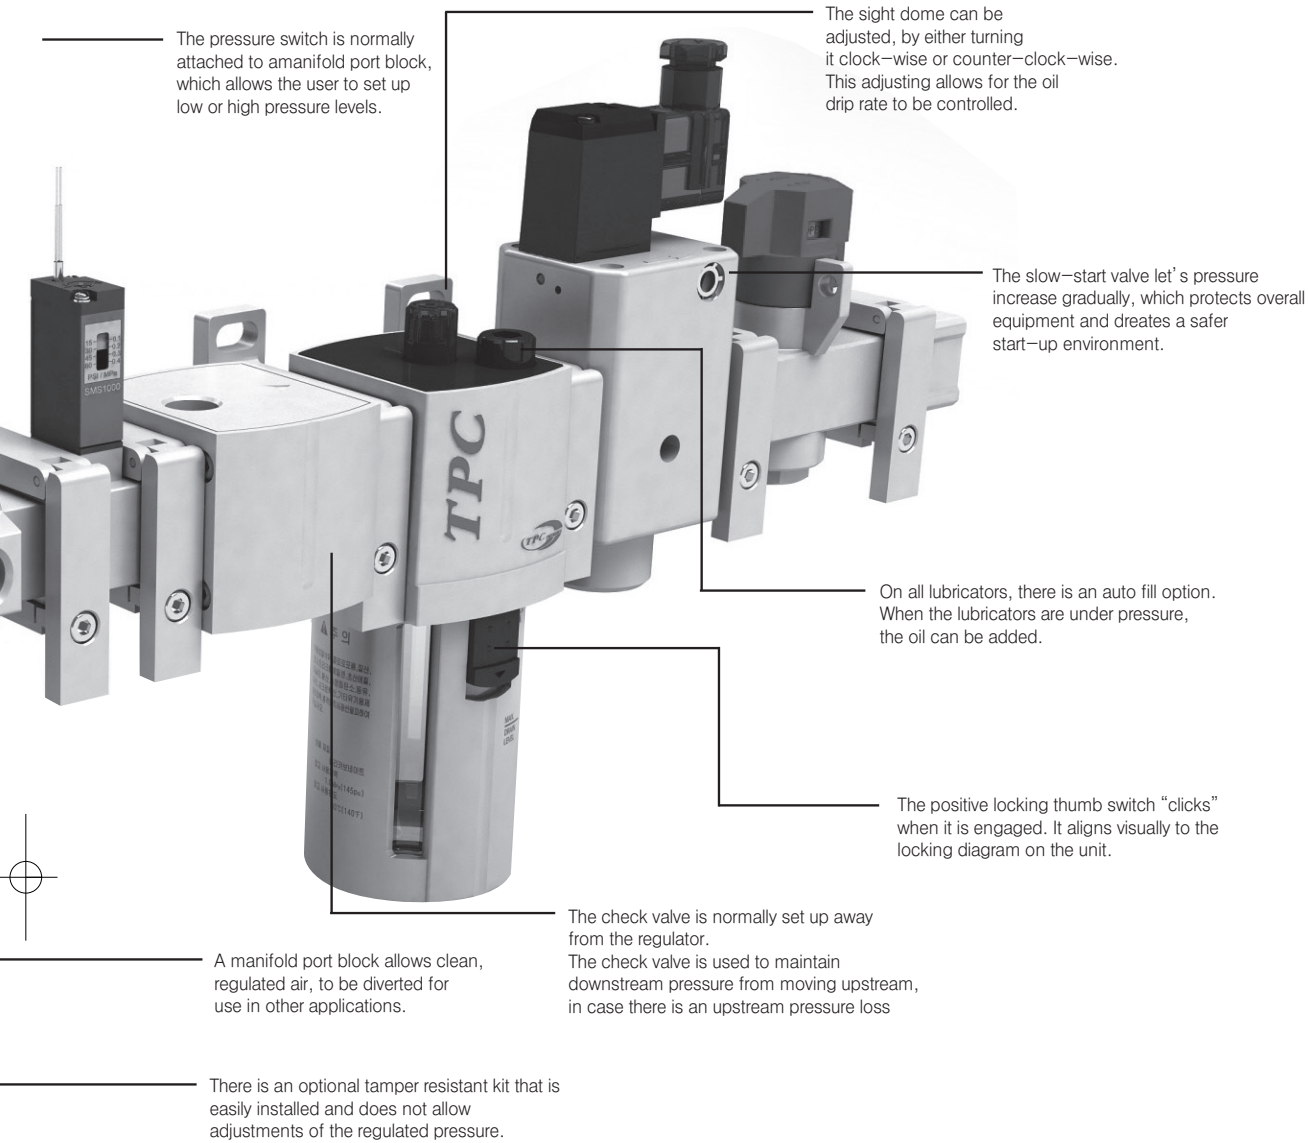

PC5 Series

3/4" AND 1"

PFH Series

1/8", 1/4", 3/8"
1/2", 3/4" AND 1"

PPH Series


1/4", 3/8" AND 1/2"

Series PC5

Combination 3/4" and 1"



Symbol



Standard Specifications

Fluid	Air	
Max. Operating Pressure (MPa)	1.0(140psi)	
Proof Pressure (MPa)	1.5(200psi)	
Set Pressure	Standard	0.05 ~ 1.0(7~140psi)
Range(MPa)	Madd to Order Specifications	0.05-0.2(7~30psi), 0.05-0.47(7~60psi), 0.05-1.5(7~200psi)
Ambient and Fluid Temperature (°C)	-5~60(23~140°F) (Non-freezing)	
Flow Capacity ※	3/4"	5,700(201scfm)
(N l /min)	1"	6,100(215scfm)
Filtration (μm)	5	
Construction	Relieving Sytle	
Recommended Oil	ISO VG32 (Turbine Oil 1 Class)	
Port Size for Pressure Gauge (Rc (PT), NPT)	1/8"	
Weight (kg)	4.06(8.95lb)	

※ Test conditions : Supply pressure 0.7MPa(100psi), pre-set pressure 0.6MPa(90psi)

How to Order

PC 5 A — * 10 D G — * — VWZ

Series
(Combination Unit)

Components

Blank	Filter-Regulator-Lubricator
A	Piggyback-Lubricator
B	Filter-Regulator
C	Filter-Coalescing Filter(0.3)-Regulator
D	Piggyback-Coalescing Filter(0.3)
E	Filter-Coalescing Filter(0.01)-Regulator
F	Piggyback-Coalescing Filter(0.01)

Thread

Blank	Rc(PT)
N	NPT
G	G(PF)

Port Size

06	3/4
10	1

Drain Option

Blank	Manual Drain
D	Auto Drain (N.O Type)

Note1) Min. operating pressure is 0.15MPa(20psi) for Auto Drain (N.O Type)

Pressure Gauge

Symbol	Description	Pressure Range
Blank	None	
G	Integral Pressure Gauge (W/Limit Indicator)	1.0MPa(140psi)
P	Pressure Gauge	1.0MPa(140psi)
P2	Pressure Gauge	0.2MPa(30psi)
P4	Pressure Gauge	0.4MPa(60psi)

Accessories

Symbol	Port Size	Description	Applicable Series
C1	1/8"		PC2~PC3
C2	1/4"	Check Valve	PC2~PC4
C3	3/8"		PC4
H	-	Shut-off Valve	PC2~PC5
M1	1/8"		PC2~PC3
M2	1/4"	Modular Manifold Block Kit	PC2~PC4
M3	3/8"		PC4
V	-	Lock-out Valve	PC2~PC5
W	-	Modular Pipe Adapter Kit	PC2~PC5
Z1	-	Pressure Switch, AC110V	PC2~PC5
Z5	-	Pressure Switch, DC24V	PC2~PC5

* Refer to page 900 or how to attach bracket & how to combine the accessories

* When specifying more than one symbol, indicate them alphabetically Ex) CIMZ

Other Option

Blank	Set at 0 to 1.0 MPa, 5μm (Standard)			
2	Set at 0 to 0.2 MPa	K	Built-in Check Valve	Note1)
4	Set at 0 to 0.4 MPa	L	Life Indicator	
15	Set at 0 to 1.5 MPa	R	Flow direction : Right→Left	Note2,3)
E	Non-relieving type	T	Tamper Resistant Kit	
J2	Filter element - 20μm	U	Regulator (Top mounted)	
J4	Filter element - 40μm	XC16	Copper-free	



Note2) Refer to page 935 for Built-in check valve, Tamper resistant kit.
Note3) Separately packed, Not assembled.

* If ordering more than one option, indicate symbols numerically then alphabetically Ex) 2EK

* Over Max. pressure value can be set.

Series PC5

Construction

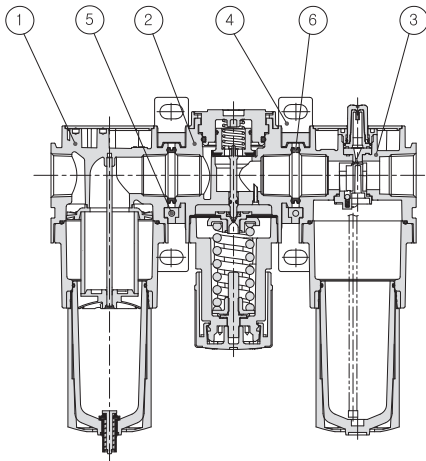

Auto-Drain Type




Main Parts/Parts List

NO.	Description	Material	Remark
①	Filter ass'y	-	
②	Regulator ass'y	-	
③	Lubricator ass'y	-	
④	Bracket ass'y	Aluminum	
⑤	Connecting screw	Carbon Steel	

Replacement Parts/Parts List

NO.	Description	Material	Part No.
⑥	Spacer O-ring	NBR	PC5-04-001-01
⑦	Auto-drain ass'y	-	TAF3000-04A-6008

PC5 Dimensions

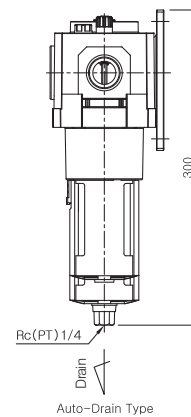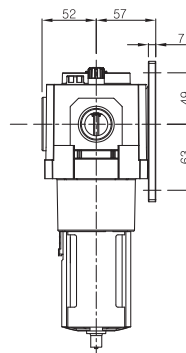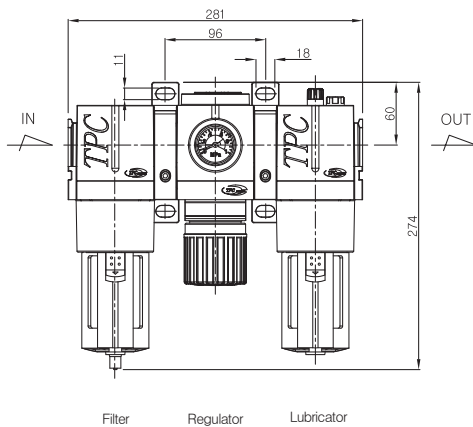

Auto-Drain Type

PC2

PF2

PR2

PL2

PP2

PC3

PF3

PR3

PL3

PP3

PC4

PF4

PR4

PL4

PP4

PC5

PF5

PR5

PL5

PP5

PFH(U)2~
PFH(U)5

PPH(U)3~
PPH(U)4

PLV


PSH

PCV


MB

Series PC5

■ PC5A Dimensions

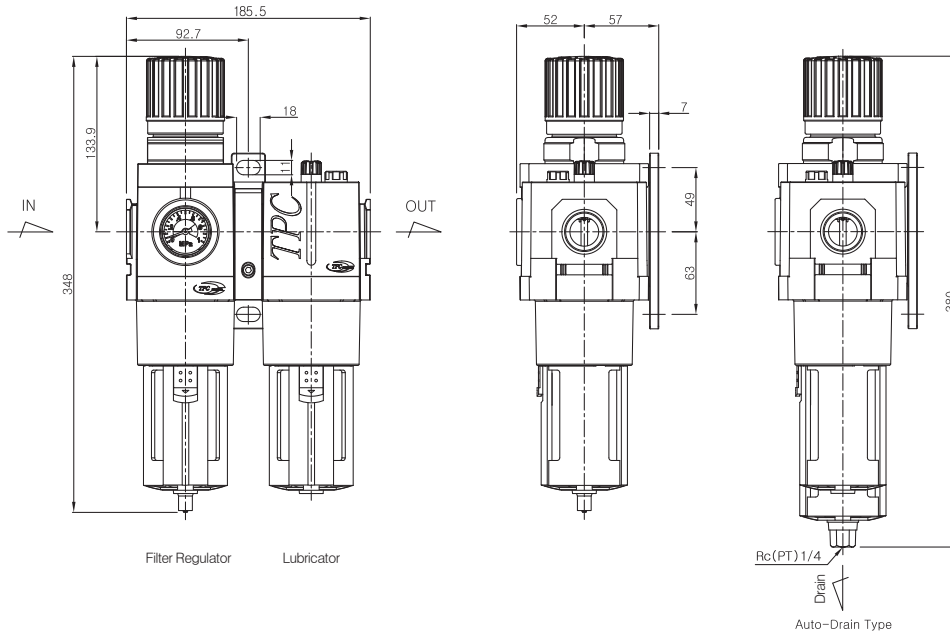


■ PC5B Dimensions

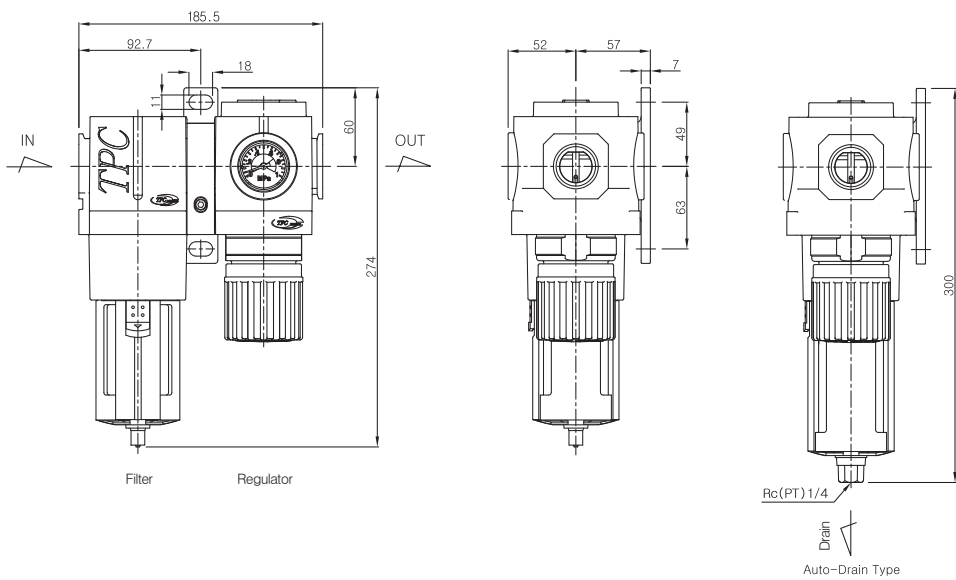


Series PC5

PC5 Series Flow Characteristics


▶ 3/4" PC5

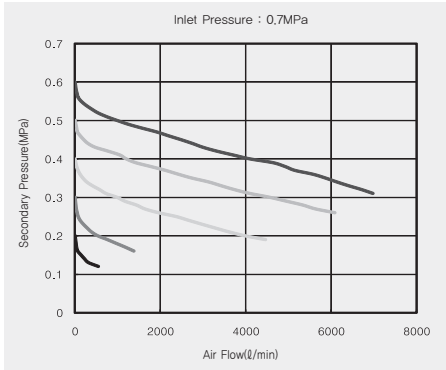


▶ 1" PC5

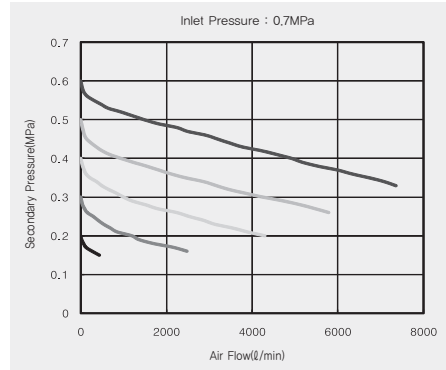


▶ 3/4" PC5A

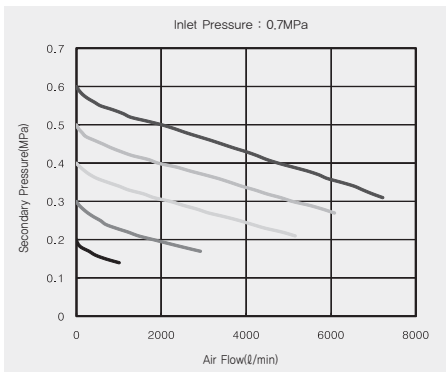

▶ 1" PC5A

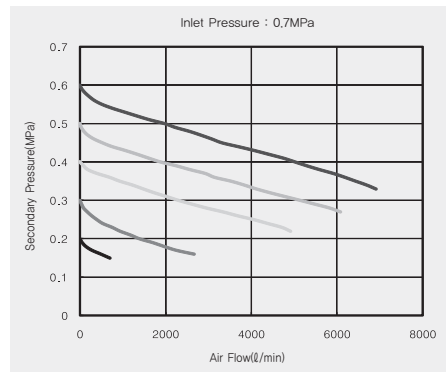


PC5 Series Pressure Characteristics

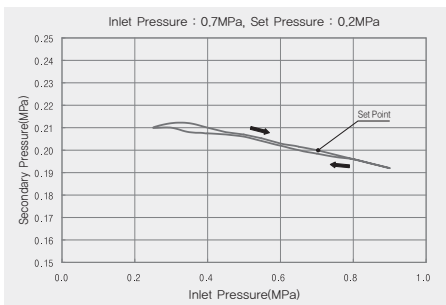

- PC2
- PF2
- PR2
- PL2
- PP2
- PC3
- PF3
- PR3
- PL3
- PP3
- PC4
- PF4
- PR4
- PL4
- PP4
- PC5**
- PF5
- PR5
- PL5
- PP5
- PFH(U)2~
PFH(U)5
- PPH(U)3~
PPH(U)4
- PLV
- PSH
- PCV
- MB

Series PC2~PC5

The Mounting Position of Bracket

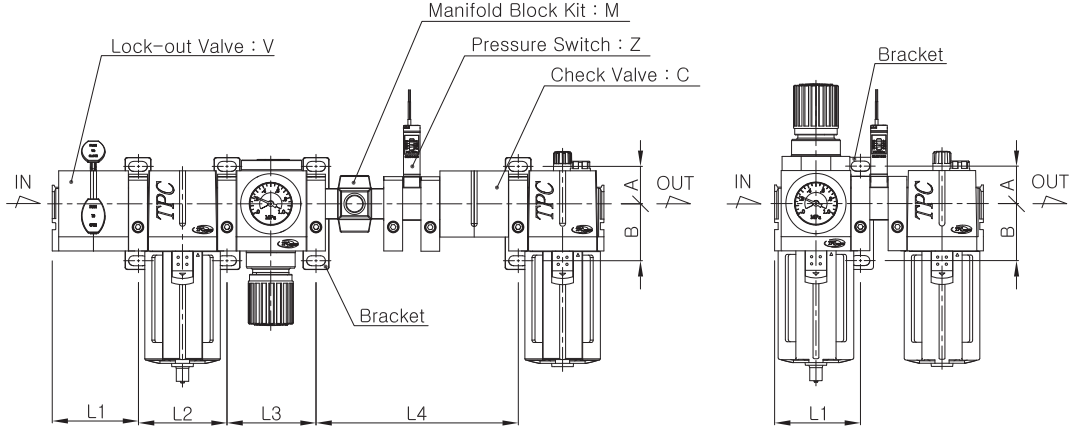

Attachment Type	C			M			V			Z			CM			CV				CZ			MV			
	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L4	L1	L2	L3	L1	L2	L3	L4
PC2	40	40	40	40	40	40	40	40	40	40	40	12	40	40	80	40	40	40	40	40	40	52	40	40	40	40
PC3	56	56	56	56	56	49	56	56	56	56	56	13	56	56	105	56	56	56	56	56	56	69	56	56	56	49
PC4	72.7	72.7	74.4	72.7	75.4	65.4	72.7	75.4	75.4	72.7	75.4	31.4	72.7	75.4	139.8	72.7	75.4	75.4	74.4	72.7	75.4	105.8	72.7	75.4	75.4	65.4
PC5	-	-	-	-	-	-	92.7	95.4	95.4	92.7	95.4	36.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Attachment Type	MZ			VZ				CMV				CMZ			CVZ				MVZ				CMVZ			
	L1	L2	L3	L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4
PC2	40	40	52	40	40	40	12	40	40	40	80	40	40	92	40	40	40	52	40	40	40	40	52	40	40	92
PC3	56	56	62	56	56	56	13	56	56	56	105	56	56	118	56	56	56	69	56	56	56	56	69	56	56	118
PC4	72.7	75.4	96.8	72.7	75.4	75.4	31.4	72.7	75.4	75.4	139.8	72.7	75.4	171.2	72.7	75.4	75.4	105.8	72.7	75.4	75.4	96.8	72.7	75.4	75.4	171.2
PC5	-	-	-	92.7	95.4	95.4	36.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Attachment Type	C		V		Z		CV		CZ		VZ		CVZ		
	L1	L2	L1	L2	L1	L1	L2	L3	L1	L2	L1	L2	L1	L2	L3
PC2A	40	40	40	40	40	40	40	40	52	40	40	40	40	40	52
PC3A	56	56	56	56	56	56	56	56	69	56	56	56	56	56	69
PC4A	72.7	74.4	72.7	75.4	72.7	72.7	75.4	74.4	72.7	105.8	72.7	75.4	72.7	75.4	105.8
PC5A	-	-	-	-	-	-	-	-	92.7	95.4	-	-	-	-	-

Attachment Type	M			V			Z			MV			MZ			VZ			MVZ	
	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2
PC2B	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
PC3B	56	56	56	56	56	49	56	56	56	56	56	56	56	56	56	56	56	56	56	56
PC4B	72.7	75.4	72.7	75.4	72.7	75.4	72.7	75.4	75.4	72.7	75.4	72.7	75.4	75.4	72.7	75.4	75.4	72.7	75.4	75.4
PC5B	-	-	92.7	95.4	92.7	95.4	-	-	-	-	-	92.7	95.4	95.4	-	-	-	-	-	-

L1 : Form inlet to the mounting hole of 1st bracket
 L2 : Form the mounting hole of 1st bracket to 2nd bracket' s
 L3 : Form the mounting hole of 2nd bracket to 3rd bracket' s
 L4 : Form the mounting hole of 3rd bracket to 4th bracket' s
 For the size of A and B, please refer to the dimensions.